

ADJUSTABLE 2-WAY CROSS BAR RACK

ITEM#:PS2CBADJ

HANGBAR 1 X

FACEOUT 2 X

TOP UPRIGHT 2 X

SET SCREW 2 X

ADJUSTABLE CONNECTOR 2X





WRENCH

HEX WRENCH


BOTTOM UPRIGHT 2 X

BASE 1 X


CASTER 4 X

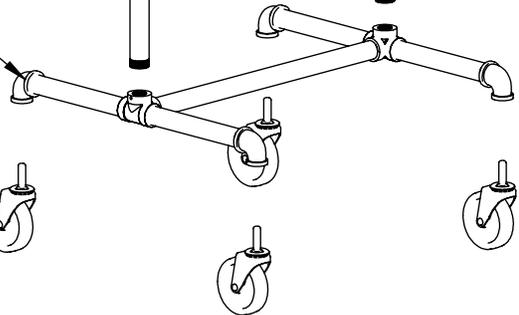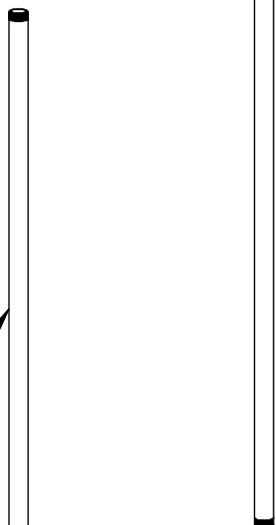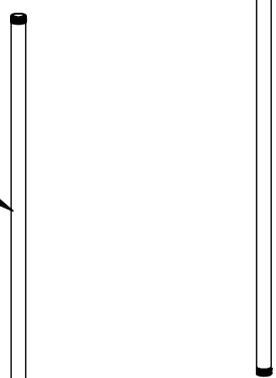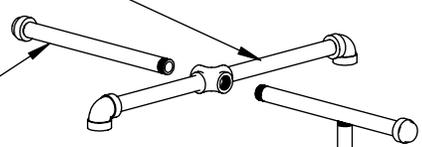


INCLUDED PARTS AND TOOLS

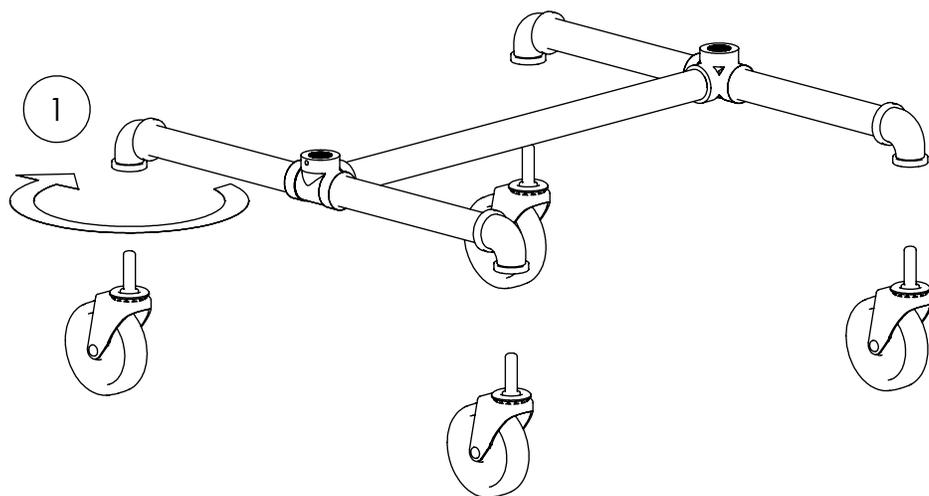

1 SCREW THE CASTERS INTO THE BASE AS SHOWN USING WRENCH

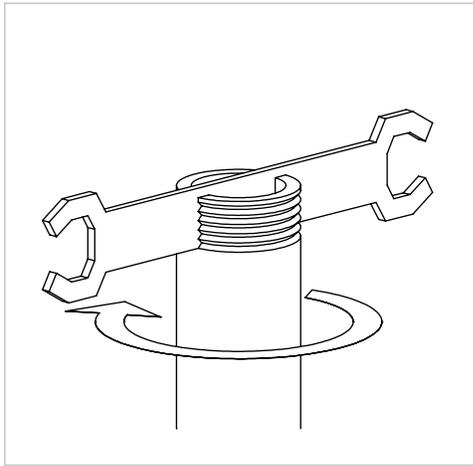

2A

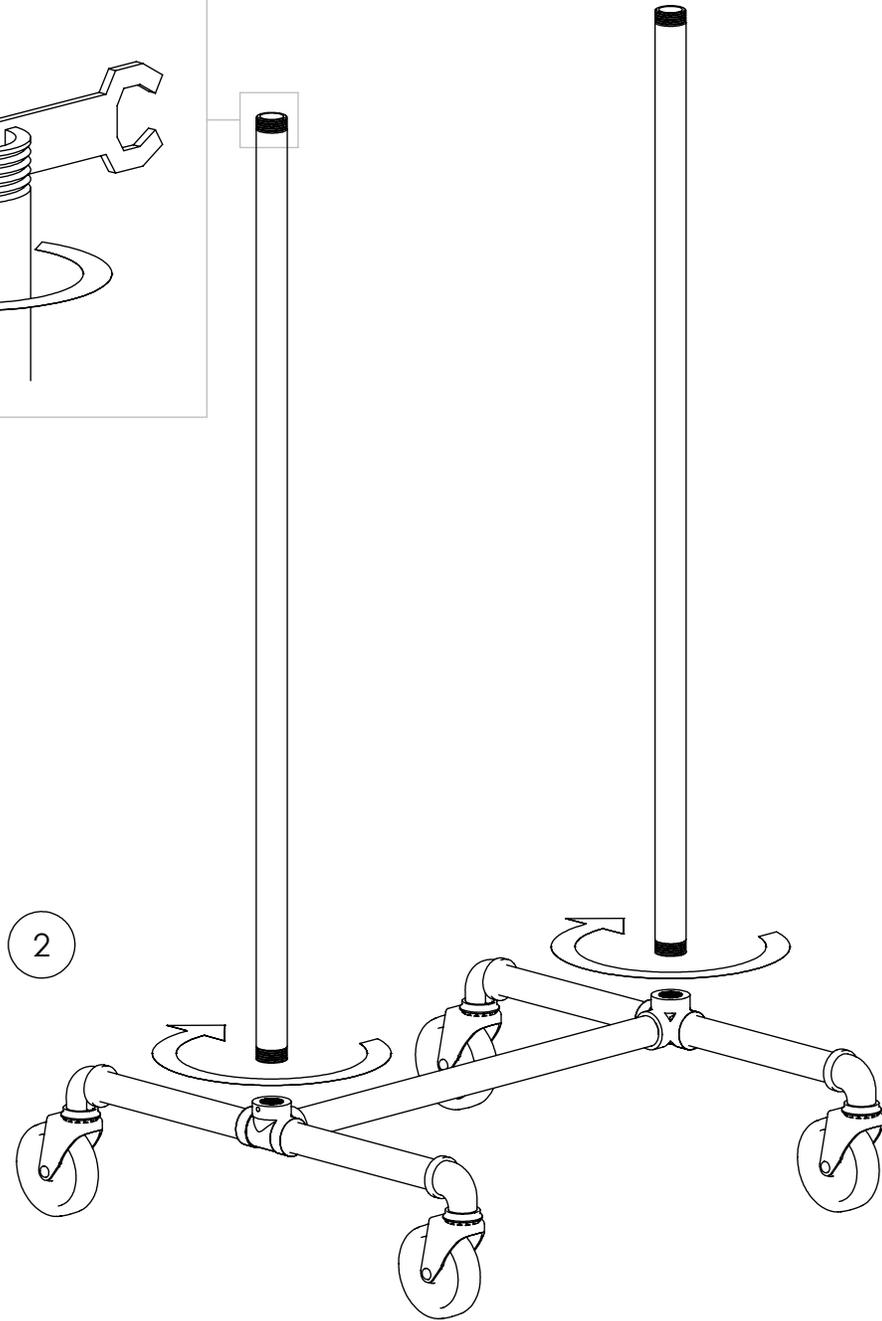


2

2


BY HAND, SCREW IN BOTTOM UPRIGHTS AS SHOWN


2A

TO FULLY TIGHTEN UPRIGHT, PLACE INCLUDED WRENCH INTO PIPE SLOTS AS SHOWN. TIGHTEN FULLY.

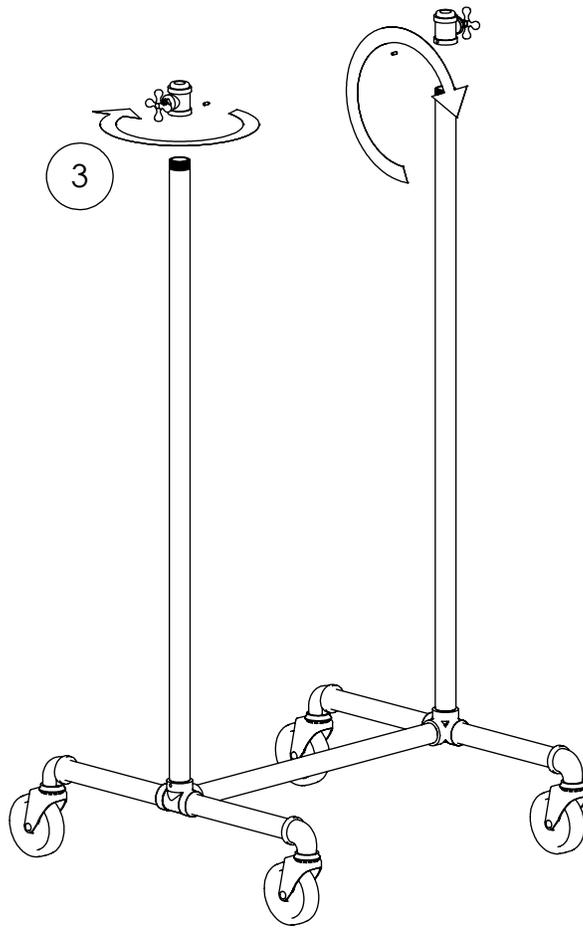


- 3 BY HAND, SCREW ADJUSTABLE CONNECTORS TO BOTTOM UPRIGHTS SUFFICIENTLY & THEN ADJUST SO THAT IT ALIGNS AS SHOWN BELOW
- 4 TIGHTEN THE SET SCREW USING HEX WRENCH TO LOCK ADJUSTABLE CONNECTOR IN PLACE.

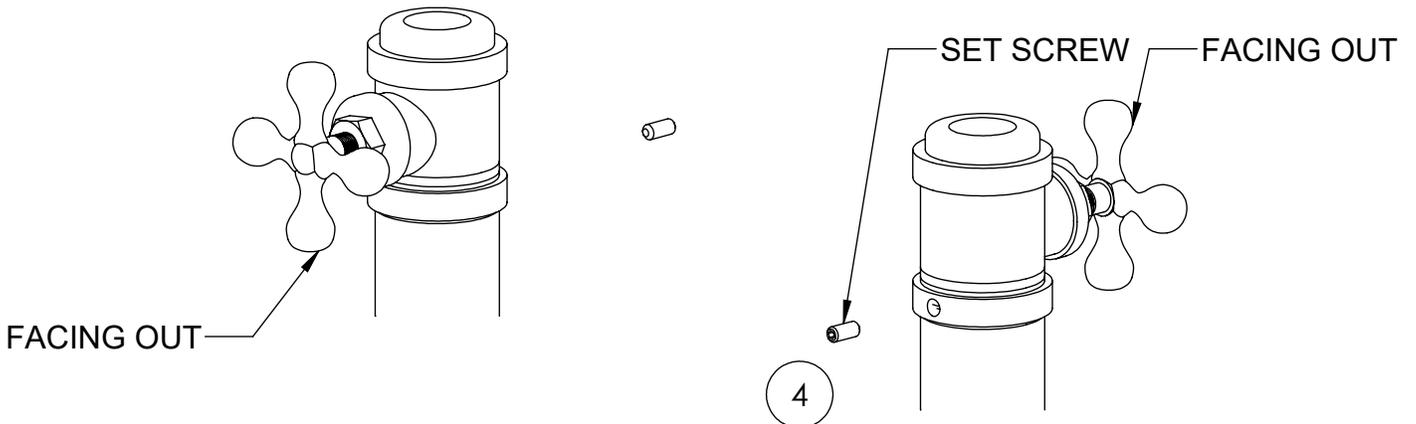

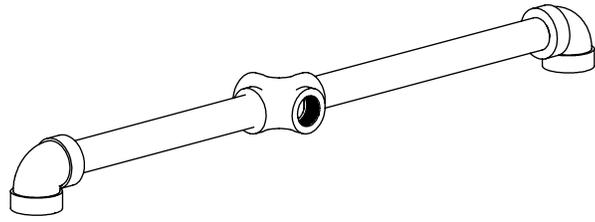


5

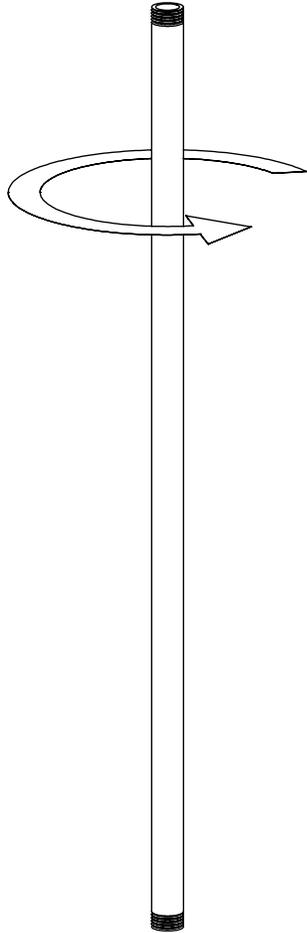


5

BY HAND, SCREW IN TOP UPRIGHTS TO HANGBAR AS SHOWN

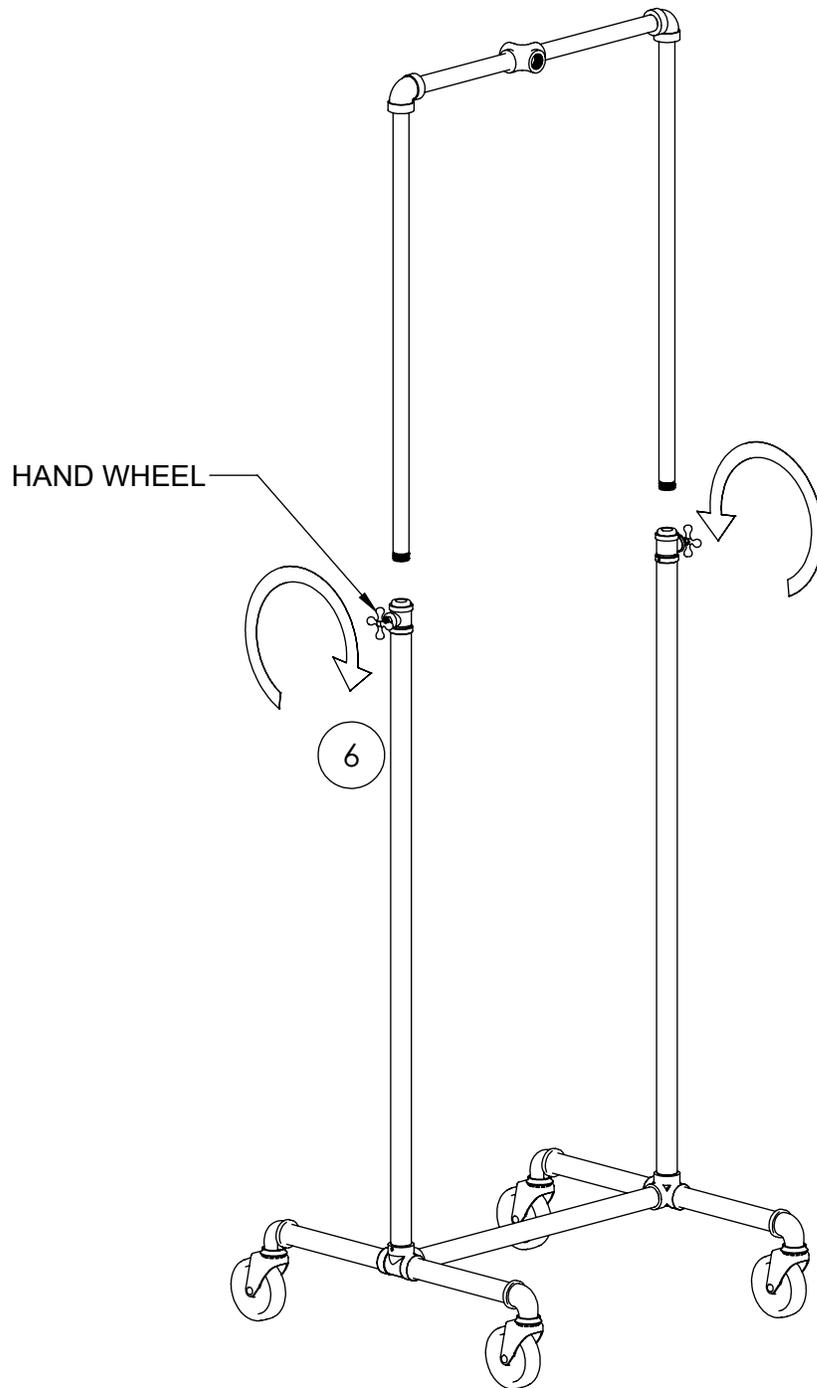

6

(UNTIGHTEN HAND WHEEL)
DROP HANGBAR ASSEMBLY FROM STEP 7 AS SHOWN AT DESIRED HEIGHT
& LOCK IN POSITION BY TIGHTENING THE HAND WHEEL.

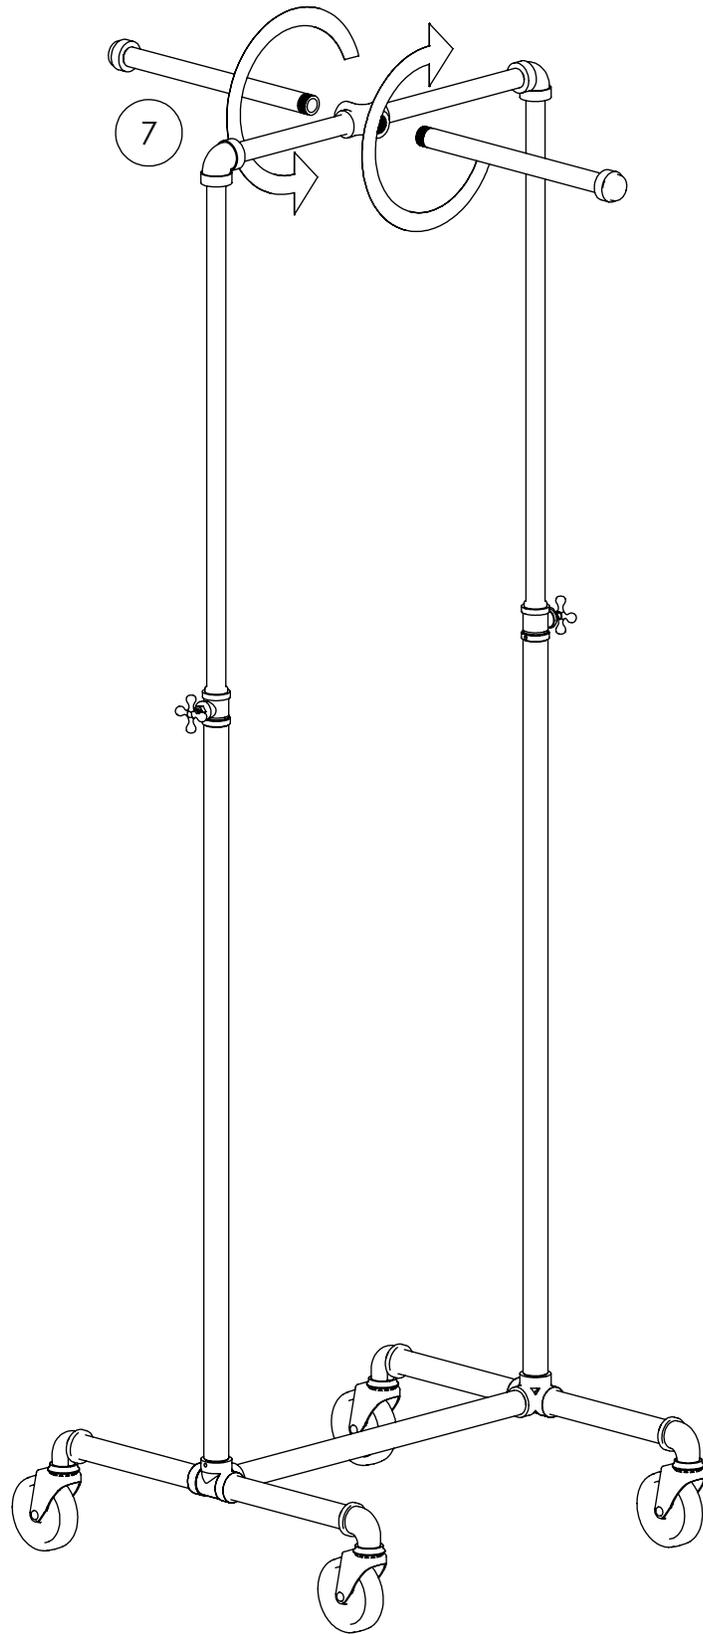

7 SCREW IN FACEOUTS TO HANGBAR