




2-TIER ADJUSTABLE RECTANGULAR BELT RACK


Item # K99

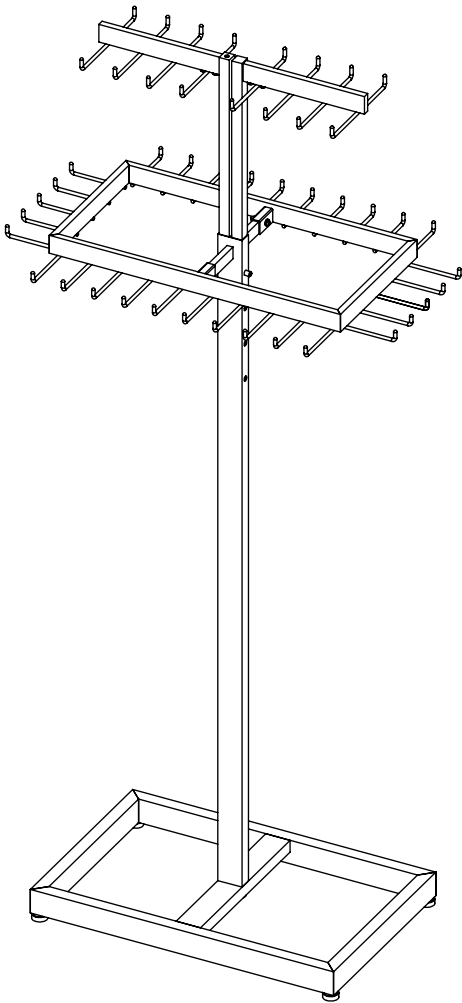



**2 PEOPLE
REQUIRED
FOR
ASSEMBLY**


INCLUDED HARDWARE


- 


4X
5/16-18 x 1" L HEAVY
DUTY NYLON LEVELER
- 


2X
3/8" FLAT WASHER
- 


2X
3/8-16 X 2" L SOCKET
BUTTON HEAD CAP SCREW
- 

2X
3/8" LOCK WASHER
- 

6X
1/4" LOCK WASHER
- 

6X
1/4" LOCK WASHER
- 

2X
1/4-20 X 1" L SOCKET
BUTTON HEAD CAP SCREW
- 


4X
1/4-20 X 1/2" L SOCKET
BUTTON HEAD CAP SCREW
- 

2X
1/4-20 ACORN NUT

TOOLS REQUIRED




ALLEN KEY



WRENCH


1

- INSTALL (4) LEVELERS INTO THE BOTTOM OF THE BASE.
- MOUNT THE UPRIGHT TO THE TOP OF THE BASE.

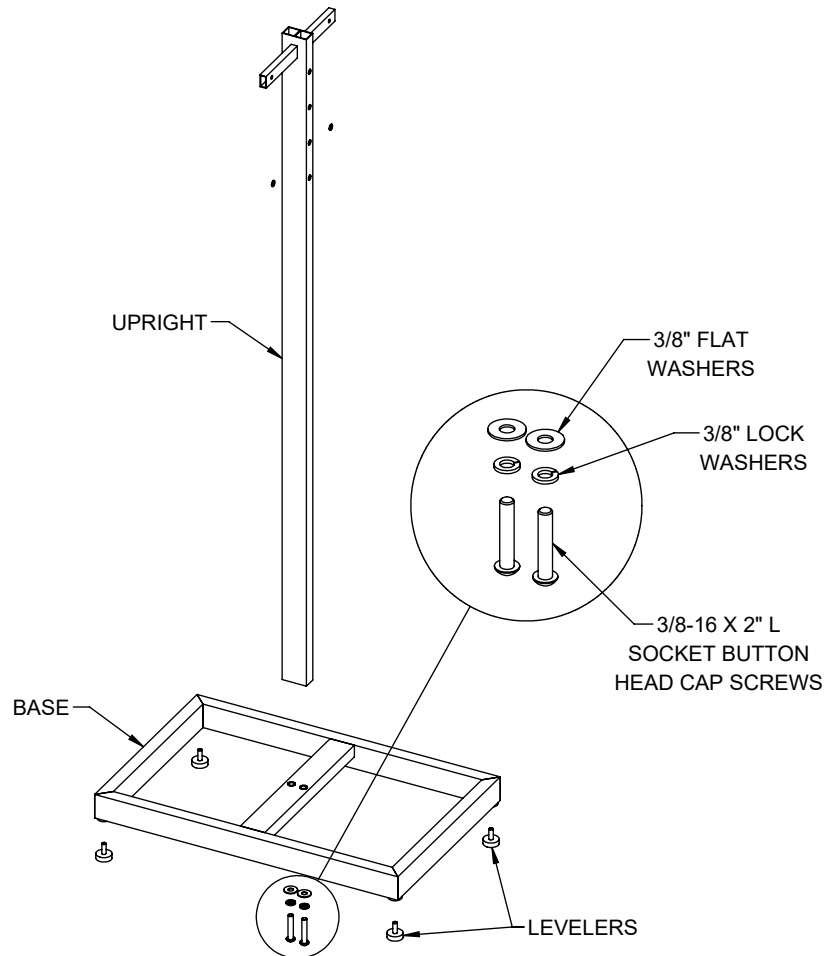

2


- MOUNT THE LOWER BELT RACK TO THE UPRIGHT.

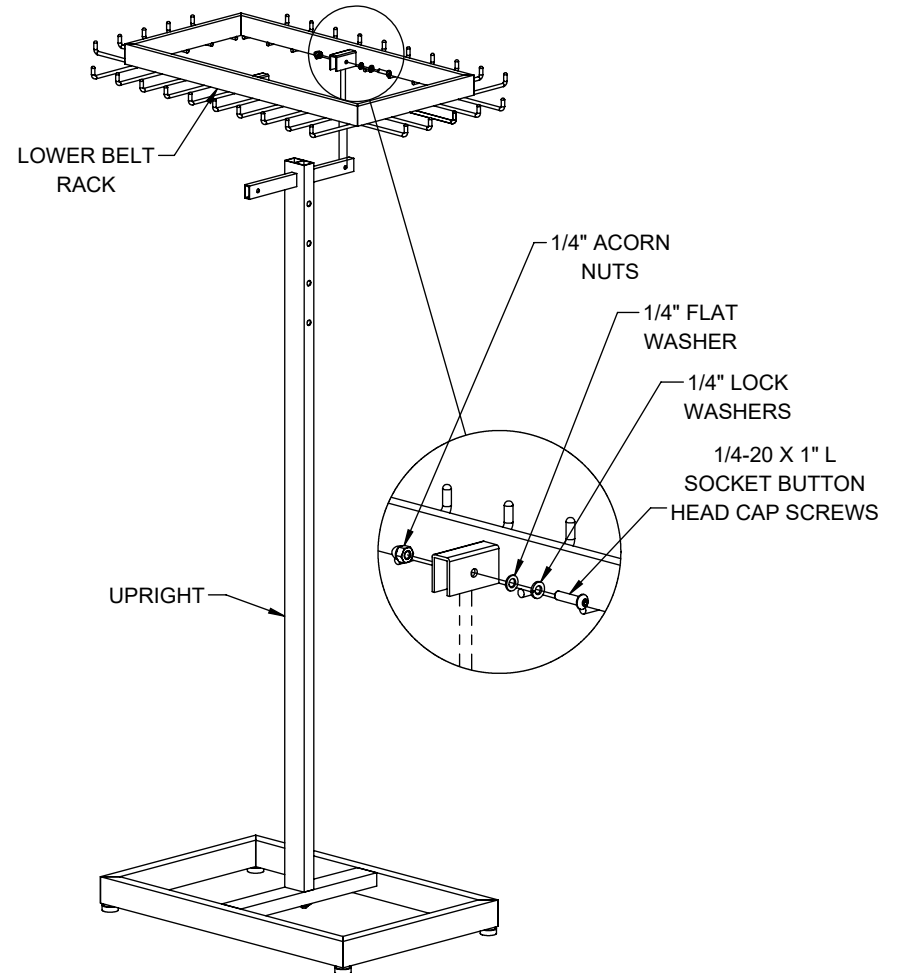

3

MOUNT THE HORIZONTAL FACEOUT TO THE VERTICAL TUBE FOR THE ARM.

REPEAT THIS STEP FOR THE OTHER ARM

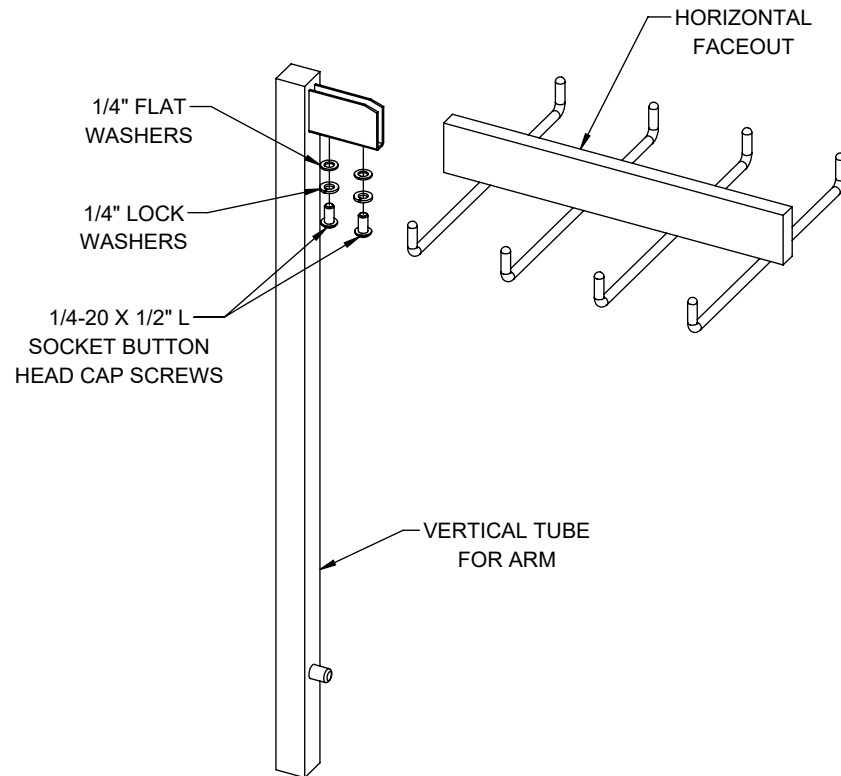

4

INSTALL (2) ADJUSTABLE ARMS INTO THE UPRIGHT, AND SET THEM AT THE DESIRED HEIGHT USING THE SPRING PUSH BUTTON.

